



攜帶式磁性鑽孔機

PORTABLE ELECTROMAGNETIC DRILLING MACHINE


特點：

- 刀具升降單柱齒排管之設計，比一般舊機型滑板控制升降的更堅固、耐用。
- 機體的高度232mm，比一般舊型裝電鑽的磁性鑽台低了許多。可加工低空間的工作物(舊型磁性鑽台的最低高度約為450mm)
- 可用刀具柄19mm短型麻花鑽頭來鑽16mm以下之孔。

FEATURES:

- The cutter lifting tube is with tooth row design which is stronger and more durable than the old slide plate type.
- The minimum height of the machine is 232mm and it's much lower than the old type machine which is with electric drill. This machine can be used for processing object with low space. (the minimum height of the old type machine is 450mm)
- The 19mm shank with short type twist drill bit can be used for drilling hole which is smaller than 16mm.

FM-35E

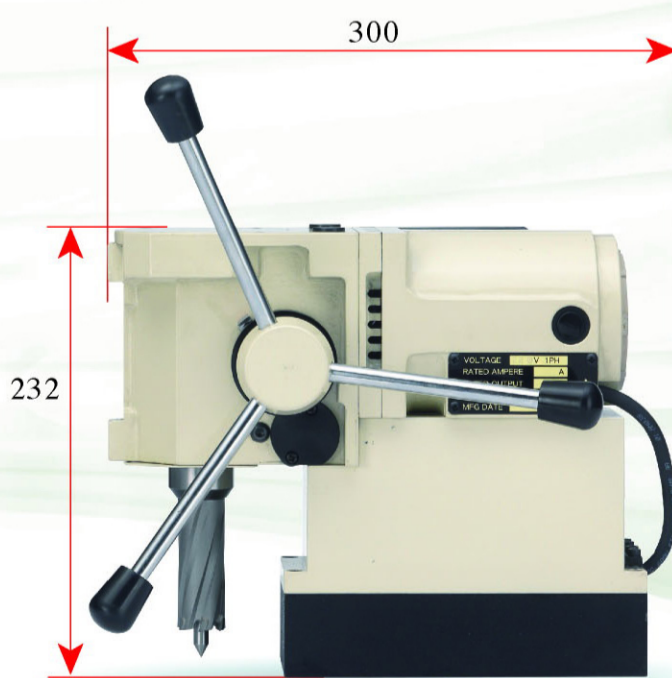

型式 Model	FM-35E
電源(單相) Power (AC)	110V-120V 50/60 Hz 220V-240V 50/60 Hz
額定耗量 Motor Rated Output	110V-120V 1010W 220V-240V 1010W
額定電流 Motor Rated Ampere	110V-120V 9.2A 220V-240V 4.6A
無負載回轉速 No Load Speed	720min-1
穿孔徑(穴鑽) Hole-cutting Capacity	17 to 35mm
鑽孔能力(短型麻花鑽頭) Drill Capacity	6 to 16mm
進刀行程 Feeding Stroke	62mm
磁鐵尺寸 Magnet Dimensions	81mm(W)×190mm(L)
磁鐵吸持動力 Magnet Holding Power	800kgf
鐵板厚度 Plate Thickness	6-40mm
機台重量 Weight	12kgs
高度(最低) Lowest height	232mm
標準附件 Standard Fitting	Connector of hole Cutter ×1piece Pilot Pin 50L ×1piece Coolant tank set ×1 set Allen key 6mm ×1piece 3mm ×1piece



升山工業股份有限公司

TSYR TZUN INDUSTRIAL CO., LTD.

台中市412大里區國中路481號
No.481, Kuochung Rd., Tali District, Taichung City 412, Taiwan

TEL : 04-24067770

FAX : 04-24064033

E-mail: tsyrtzun@ms32.hinet.net

http://www.tsyrtzun.com